

**In series**

The model is in series and available for the long term.




uEye industrial cameras now also work with IDS peak! We recommend the Software Development Kit for the implementation of new projects. [Learn about the process here and switch now.](#) Please note: The technical data given here was measured using the IDS Software Suite.

## Specification

### Sensor

|   |   |
|---|---|
| Sensor type                             | CMOS Mono   |
| Shutter                                 | Global Shutter / Rolling shutter / Global Start Shutter |
| Sensor characteristic                   | Linear  |
| Readout mode                            | Progressive scan  |
| Pixel Class                             | 1.3 MP  |
| Resolution                              | 1.31 Mpix   |
| Resolution (h x v)                      | 1280 x 1024 Pixel                                       |
| Aspect ratio                            | 5:4   |
| ADC                                     | 10 bit  |
| Color depth (camera)                    | 12 bit  |
| Optical sensor class                    | 1/1.8"  |
| Optical Size                            | 6.784 mm x 5.427 mm)                                    |
| Optical sensor diagonal                 | 8.69 mm (1/1.84")                                       |
| Pixel size                              | 5.3 µm  |
| Manufacturer                            | e2v   |
| Sensor Model                            | EV76C560ABT   |
| Gain (master/RGB)                       | 4x/-  |
| AOI horizontal                          | same frame rate   |
| AOI vertical                            | increased frame rate                                    |
| AOI image width / step width            | 16 / 4  |
| AOI image height / step width           | 4 / 2   |
| AOI position grid (horizontal/vertical) | 2 / 2   |
| Binning horizontal                      | same frame rate   |
| Binning vertical                        | same frame rate   |
| Binning method                          | M/C automatic   |
| Binning factor                          | 2   |
| Subsampling horizontal                  | -   |
| Subsampling vertical                    | -   |
| Subsampling method                      | -   |
| Subsampling factor                      | -   |

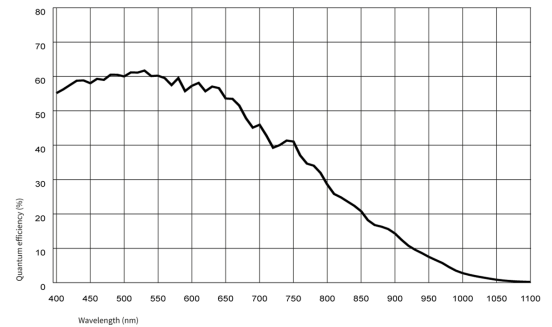

## Model

|                                   |   |
|-----------------------------------|---|
| Pixel clock range                 | 7 MHz - 86 MHz  |
| Frame rate freerun mode           | 60 fps  |
| Frame rate trigger (maximum)      | 59 fps  |
| Exposure time (minimum - maximum) | 0.009 ms - 2000 ms  |
| Power consumption                 | 1.2 W - 2.8 W   |
| Image memory                      | 128 MB  |
| Special features                  | Linescan mode<br>Scaler<br>Sequencer<br>Log mode<br>Sensor hot pixel correction<br>Fine exposure<br>Multi-AOI |

## Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


|   |                                 |
|---|---------------------------------|
| Allowed device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F   |
| Allowed device temperature during storage   | -20 °C - 60 °C / -4 °F - 140 °F |
| Humidity (relative, non-condensing)         | 20 % - 80 %                     |

## Connectors

|                     |   |
|---------------------|---|
| Interface connector | GigE RJ45, screwable                      |
| I/O connector       | 8-pin Hirose connector (HR25-7TR-8PA(73)) |
| Power supply        | 12 V - 24 V or PoE                        |

## Pin assignment I/O connector

|   |                                     |
|---|-------------------------------------|
| 1 | Ground (GND)                        |
| 2 | Flash output with optocoupler (-)   |
| 3 | General Purpose I/O (GPIO) 1        |
| 4 | Trigger input with optocoupler (-)  |
| 5 | Flash output with optocoupler (+)   |
| 6 | General Purpose I/O (GPIO) 2        |
| 7 | Trigger input with optocoupler (+)  |
| 8 | Input power supply (VCC) 12-24 V DC |



## Design

|                  |                             |
|------------------|-----------------------------|
| Lens Mount       | C-Mount                     |
| IP code          | IP30                        |
| Dimensions H/W/L | 34.0 mm x 44.0 mm x 47.0 mm |
| Mass             | 107 g                       |

## Features

|                   |                             |   |
|-------------------|-----------------------------|---|
| Image Acquisition | Freerun                     | ✓ |
|                   | Software trigger            | - |
|                   | Hardware trigger            | ✓ |
|                   | Trigger controlled exposure | - |
|                   | Denoisier                   | - |
|                   | Long exposure               | - |
|                   | Line scan                   | ✓ |
|                   | Line scan highspeed         | - |
|                   | Global start                | ✓ |

Subject to technical modifications (2024-09-16)

|                           |                                |             |
|---------------------------|--------------------------------|-------------|
| Flashing                  | Flashing                       | -           |
|                           | PWM flashing                   | -           |
| Image Adjustments         | Auto exposure                  | -           |
|                           | Auto gain                      | -           |
|                           | Auto whitebalance              | -           |
|                           | Color correction               | -           |
|                           | Gamma                          | -           |
|                           | LUT                            | -           |
|                           | Mirror/flip                    | -           |
| On-board Image Processing | Pixel formats                  |             |
|                           | Region of interest             | ✓           |
|                           | Decimation (FPGA)              | -           |
|                           | Decimation (Sensor)            | (2,4)x(2,4) |
|                           | Binning (FPGA)                 | -           |
| Others                    | Chunks                         | -           |
|                           | Sequencer                      | ✓           |
|                           | Firmware update                | -           |
|                           | 1st supported firmware version | 4.96.1      |



**VISION CONSULTANCY**  
MAKING THE UNSEEN VISIBLE

Thank you for downloading this document from  
[www.machine-vision-shop.com](http://www.machine-vision-shop.com)

If you have any questions, you need help composing the  
right package for your application or do you want to order?

Feel free to contact us via e-mail at [sales@vision-consultancy.nl](mailto:sales@vision-consultancy.nl) or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Cromptoets



**VISION CONSULTANCY**

Robert Schumandomein 2  
6229 ES Maastricht  
The Netherlands

+31 (0) 438 522 651

[sales@vision-consultancy.nl](mailto:sales@vision-consultancy.nl)

Scan me to visit  
[machine-vision-shop](http://machine-vision-shop)

